


AUSTIN METRO



METRO Standard/ L



- 998 cc 'A-Plus' power unit
- 12,000 mile main service interval
- Wax injection underbody protection
- Heated rear window
- Acoustic control pack

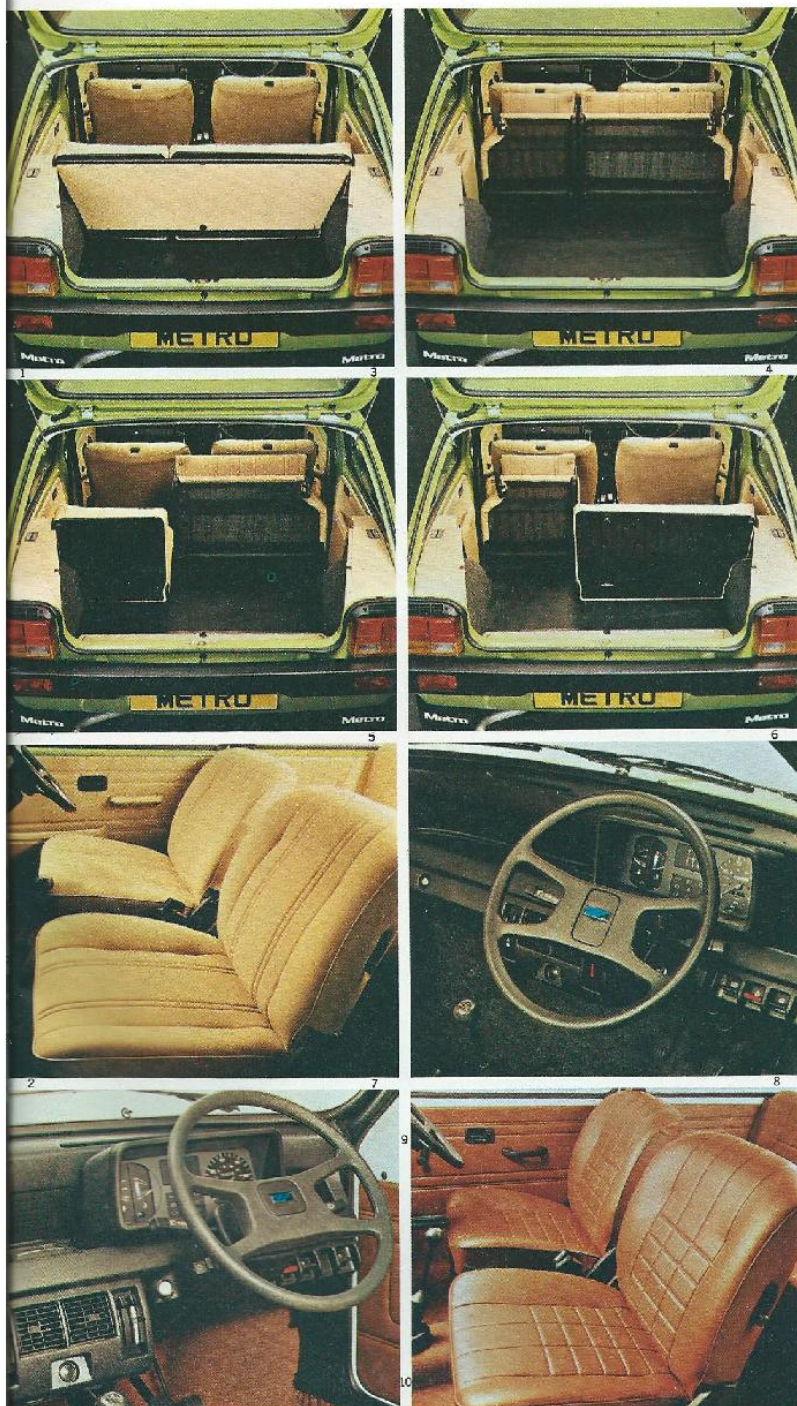

Engine

4 cylinder transverse, 4-star (97 octane) fuel, OHV 998 cc, 45 bhp. (alternative: 2-star, 41 bhp unit).

Transmission

4 speed all-synchromesh, remote control. Diaphragm spring clutch, hydraulically operated. Integral final drive.

Suspension

Front: independent, Hydragas® springs, telescopic dampers, anti-roll bar. Rear: independent, trailing arms, Hydragas® springs with internal damping plus coil, pre-load springs.

Steering

Rack and Pinion.

Brakes

Dual circuit, system with duplicated front brake lines. Front 21.3 cm discs, 17.8 cm rear drums.

Wheels and tyres

Pressed steel ventilated disc wheels, 135 x 12 steel braided radial ply tyres. Moulded hub covers.

Electrical

Metro: 12 volt negative earth system. Alternator. Twin column stalks for indicators, horn, dip and 2 speed wipers with electric screen washers and flick wipe. Thermostatic electric cooling fan. Heated rear window. Reversing lamps. Twin rear fog guard lamps. Hazard warning lamps. Metro L: as Metro, plus: Rear screen wash/wipe. Illuminated switchgear and heater controls.

Instrumentation

Metro and Metro L: Printed circuit connections, speedometer with trip recorder, fuel level and water temperature gauges. Warning lights for brake circuit failure/low fluid, brake pad wear, choke, handbrake, oil pressure, seat belt, ignition, main beam, indicators, hazard lamps, heated rear window, rear fog lamps.

Interior Features

Metro: vinyl seat covering. Tilt/slide front seats. Jack-knife folding rear seat with hinged/detachable carpeted rear shelf. Fitted carpet. Twin sun visors with driver's ticket pocket. Dipping rear view mirror. 4-spoke steering wheel. Front parcel shelf. Freshair heater/demister with 2-speed fan and face level air vents. Loadspace floor mat. Interior bonnet release. Concoated inertia reel front-seat belts.

Metro L: as Metro plus: Laminated windscreen. Fabric seat covering. Reclining front seats. Front door armrests and door bins. Asymmetric split rear seat. Passenger grab handles and coat hooks. Glovebox with carpet lining. Rear quarter trays. Vanity mirror. PVC trimmed loadspace sides.

Body Features



Metro: 2 door hatchback all steel unitary construction. Black rolled section bumpers with moulded wrap around cappings. Driver's door mirror. Side repeater flashers. Tailgate controlled by twin gas struts. Coachline. Rear mud flaps. Fuel filler concealed behind flap. Extensive corrosion protection, including Cathodic electrocoat primer on body and subframes, underbody seal and wax injection of box sections. Metro L: as Metro plus: Twin coachlines.

- 1 Metro L
- 2 Metro Standard
- 3/4/5/6 Split action rear seat positions (standard on Metro L)
- 7 Metro L interior
- 8 Metro L fascia
- 9 Standard Metro fascia
- 10 Standard Metro interior

METRO HILE



- High compression 998 cc 'A-Plus' power unit
- Styled halogen headlamps
- Push button radio
- Analogue clock
- Split action rear seat

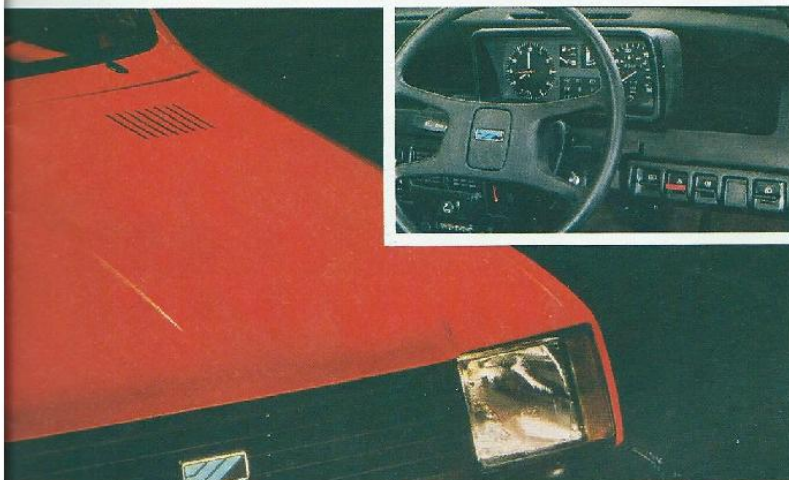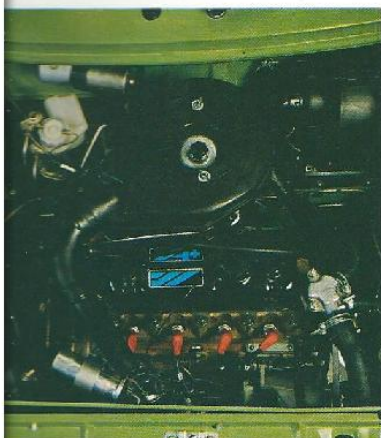

Engine

4 cylinder transverse 4 star (97 octane) fuel, OHV 998 cc, 47 bhp, Economy tuned engine.

Transmission

4 speed all-synchromesh, remote control. Diaphragm spring clutch, hydraulically operated. Integral final drive.

Suspension

Front: independent, Hydragas® springs, telescopic dampers, anti-roll bar. Rear: independent, trailing arms, Hydragas® springs with internal damping plus coil pre-load springs.

Steering

Rack and Pinion

Brakes

Dual circuit system with duplicated front brake lines. Front 21.3 cm discs, 17.8 cm rear drums.

Wheels and tyres

Pressed steel ventilated disc wheels, 135 x 12 steel braced radial ply tyres. Moulded hub covers.

Electrical

12 volt negative earth system. Alternator. Twin column stalks for indicators, horn, dip and 2-speed wipers with electric screen washers and flick wiper. Rear screen wash/wipe. Thermostatic electric cooling fan. Heated rear window. Reversing lamps. Twin rear fog guard lamps. Hazard warning lamps. Halogen headlamps incorporating front side/indicator lamps. Cigar lighter. Push button LW/VW radio. Illuminated switch gear and heater controls.

Instrumentation

Printed circuit connections. Speedometer with trip recorder. Quartz clock. Fuel level and water temperature gauges. Warning lights for brake circuit failure/low fluid, brake pad wear, choke, handbrake, oil pressure, seat belts, ignition, main beam indicators, hazard lamps, heated rear window, rear fog lamps.

Interior Features

Laminated windscreen. Fabric seat covering. Tilt/side front seats with reclining squabs. Asymmetric, jack knife folding rear seats with hinged/detachable carpeted parcel shelf. Fitted carpet. Twin sunvisors with passenger vanity mirror and driver's ticket pocket. Dipping rear view mirror. 4 spoke steering wheel. Front parcel shelf. Fresh air heater/demister with 2 speed fan and face level air vents. Passenger grab handles and coat hooks. Glovebox with carpet lining. Rear quarter trays. Loadspace floor mat and PVC trimmed sides. Interior bonnet release. Concealed inertia reel front seat belts. Front door armrests and door bins.

Body Features


2-door hatchback, all steel unitary construction. Black rolled section bumpers with moulded wrap around cappings. Driver's door mirror. Side repeater flashers. Tailgate controlled by twin gas struts. Side rubbing strip. Fuel filler concealed behind flap. Extensive corrosion protection, including Cathodic electrocoat primer on body and subframes. Underbody seal and wax injection on box sections.

METRO 1.3S

Light compact
Stylish halogen
Fresh sound
Analogic clock
Split action seat



- 60 bhp 1.3 'A-Plus' power unit
- Servo assisted brakes
- Herringbone fabric seat trim
- Tinted glass
- Tachometer/digital clock

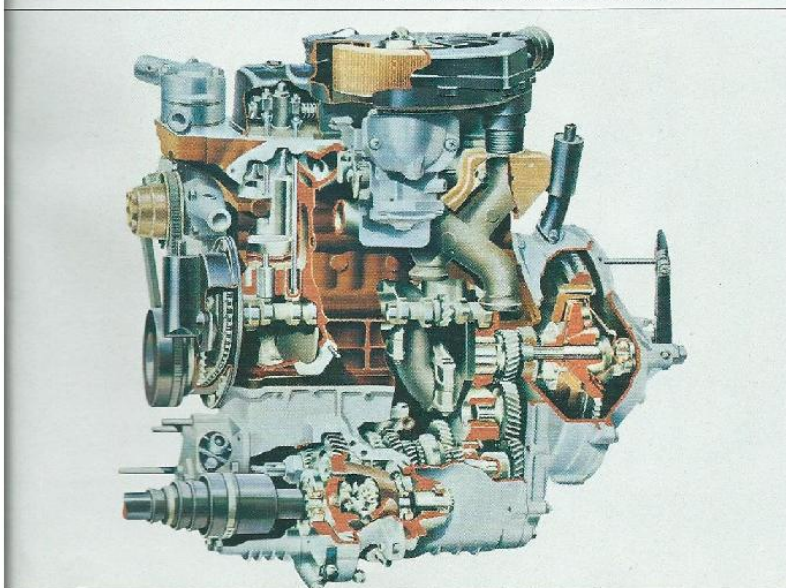

Engine

4 cylinder transverse, 4-star (97 octane) fuel, OHV 1275 cc, 60 bhp.

Transmission

4-speed all-synch, wormesh, remote control. Diaphragm spring clutch hydraulically operated. Integral final drive.

Suspension

Front: independent, Hydragas® springs, telescopic dampers, anti-roll bar.
Rear: independent, trailing arms, Hydragas® springs with internal damping plus coil pre-load springs.

Steering

Rack and Pinion.

Brakes

Servo assisted dual circuit system with duplicated front brake lines. Front 21.3 cm discs, 17.8 cm rear drums.

Wheels and tyres

Pressed steel ventilated disc wheels, 155/70 x 12 steel braced low-profile radial ply tyres. Moulded hub covers.

Electrical

12 volt negative earth system. Alternator. Twin column stalks for indicators, horn, dip and 2 speed wipers with electric screen washers and flick wipe. Rear screen wash/wipe. Thermostatic electric cooling fan. Heated rear window. Reversing lamps. Twin rear fog/lamp lamps. Hazard warning lamps. Halogen headlamps incorporating front/side indicator lamps. Cigar lighter. Push-button LW/MW radio. Illuminated switchgear and heater controls.

Instrumentation

Printed circuit connectors. Speedometer with trip recorder. Tachometer incorporating digital clock. Fuel level and water temperature gauges. Warning lights for: Brake circuit failure/low fluid level, brake pad wear, choke, handbrake, oil pressure, seat belt, ignition, main beam, indicators, hazard lamps, heated rear window, rear fog lamps.


Interior Features

Laminated windscreen. Tinted glass. Herringbone fabric seat coverings. Tilt/slide front seats with reclining scupps and valances. Asymmetric, jack-knife folding rear seats with hinge/detachable carpeted rear shelf. Fitted carpet. Twin sun visors with passenger vanity mirror and driver's ticket pocket. Dipping rear view mirror. 4 spoke steering wheel. Front parcel shelf. Fresh air heater/demister with 2-speed fan and face level air vents. Passenger grab handles and oval hooks. Glovebox with carpeted lining. Rear quarter trays. Loadspace floor mat and PVC trimmed sides. Interior bonnet release. Concealed inertia reel front seat belts. Front door armrests and door bins.


Body Features

2 door hatchback, all steel unitary construction. Black rolled section bumpers with moulded wrap around cappings. Driver's door mirror. Side repeater flashers. Tailgate controlled by twin gas struts. Two-colour side decal stripes. Fuel filter concealed behind flap. Extensive corrosion protection, including cathodic electrocoat primer on body and subframes, underbody seal and wax injection of box sections.

METRO HLS

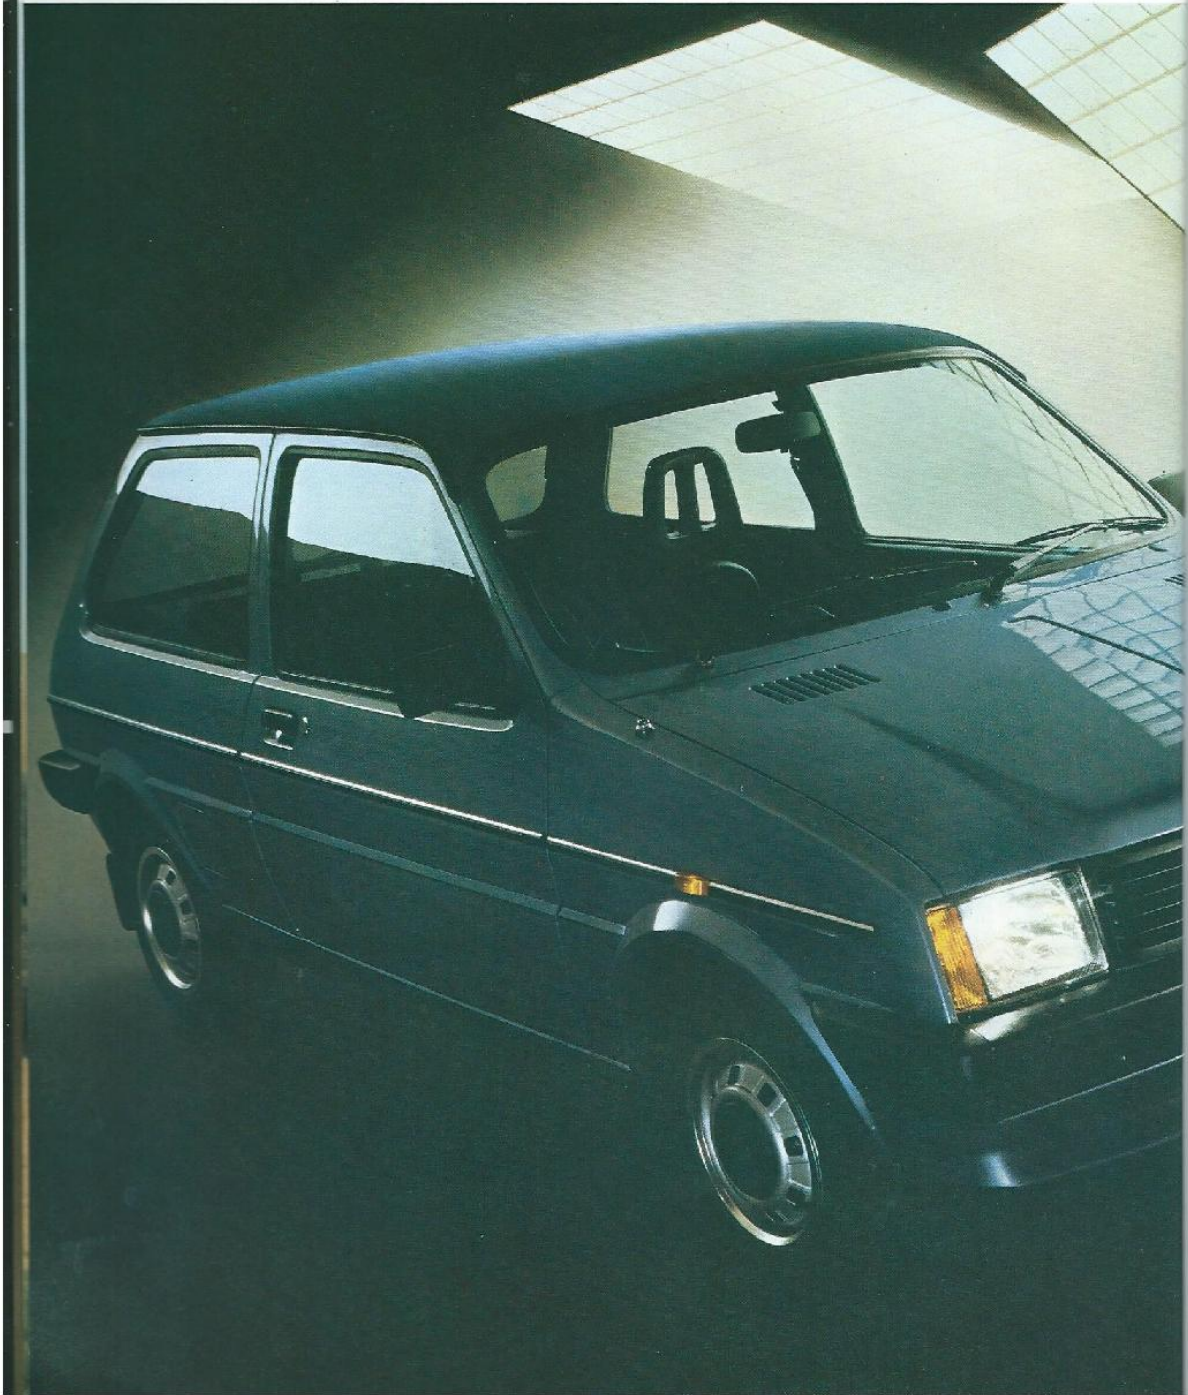

- Velour seat facings
- Velour door casings
- Front seat head restraints
- Side rubbing strip
- Carpeted load space

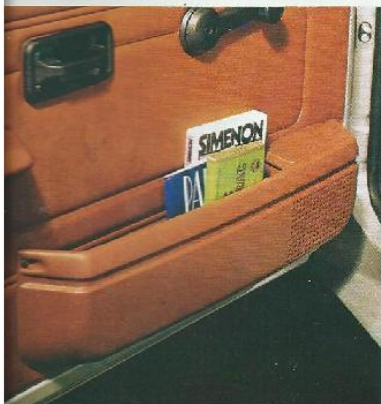

Engine

4 cylinder transverse, 4-star (97 octane) fuel, OHV
1275 cc, 60 bhp.

Transmission

4-speed all-synchromesh, remote control. Diaphragm
spring clutch hydraulically operated. Integral final drive.

Suspension

Front: independent, Hydragas® springs, telescopic
dampers, anti-roll bar.
Rear: independent, trailing arms, Hydragas® springs
with internal damping plus coil pre-load springs.

Steering

Rack and Pinion.

Brakes

Servo assisted dual circuit system with duplicated front
brake lines. Front 21.3 cm discs, 17.8 cm rear drums.

Wheels and tyres

Pressed steel ventilated disc wheels, 155/70 x 12 steel
braced low profile radial ply tyres. Moulded hub covers
and trim rings.

Electrical

12 volt negative earth system. Alternator. Twin column
stalks for indicators, horn, dip and 2 speed wipers with
electric screen washers and flick wipe. Rear screen
wash/wipe. Thermostatic electric cooling fan. Heated
rear window. Reversing lamps. Twin rear fog guard
lamps. Hazard warning lamps. Halogen headlamps
incorporating front side/indicator lamps. Cigar lighter.
Pushbutton LW/MW radio. Illuminated switchgear and
heater controls.

Instrumentation

Printed circuit connections. Speedometer with trip
recorder. Tachometer incorporating digital clock. Fuel
level and water temperature gauges. Warning lights for:
Brake circuit failure/low fluid level, brake pad wear,
choke, handbrake, oil pressure, seat belt, ignition, main
beam, indicators, hazard lamps, heated rear window,
rear fog lamps.

Interior Features

Laminated windscreens. Tinted glass. Velour seat
facings. Tilt/slide front seats with reclining squabs,
headrests and valances. Brushed nylon headlining.
Asymmetric, jack-knife folding rear seats with hinged/
detachable carpeted rear shelf. Fitted carpet. Twin
cloth-faced sun visors with passenger vanity mirror and
driver's ticket pocket. Dipping rear view mirror. 4 spoke
steering wheel. Front parcel shelf. Fresh air heater/
demister with 2-speed fan and face level vents.
Passenger grab handles and coat hooks. Glovebox with
carpeted lining, fascia shelf anti-slip mat. Rear quarter
trays. Loadspace carpeting and PVC trimmed sides.
Handbrake grip. Interior bonnet release. Concealed
inertia reel front seat belts. Cloth trimmed door and
rear quarter casings. Front door armrests and door
bins.

Body Features

2 door hatchback, all steel unitary construction. Black
rolled section bumpers with moulded wrap around
cappings. Twin door mirrors. Side repeater flashers.
Tailgate controlled by twin gas struts. Side rubbing
strip. Lockable fuel filler cap behind flap. Extensive
corrosion protection including cathodic electrocoat
primer on body and subframes, underbody seal and
wax injection of box sections.

METRO Automatic



- New 4-speed automatic gear box
- Velour seat facings
- Split action rear seat
- Push button radio
- Styled Halogen headlamps



Engine

4 cylinder transverse, 4-star (87 octane) fuel, Oil-V 1275 cc, 60 bhp.

Transmission

4 speed automatic with manual override facility and illuminated colour-change selector indicator. Integral final drive.

Suspension

Front: independent, Hydrgas[®] springs, telescopic dampers, anti-roll bar.
Rear: independent, trailing arms, Hydrgas[®] springs with internal damping plus coil pre-load springs.

Steering

Rack and Pinion.

Brakes

Servo assisted dual circuit system with duplicated front brake lines. Front 21.3 cm discs, 17.8 cm rear drums.

Wheels and tyres

Pressed steel ventilated disc wheels, 155/70 x 12 steel braced low-profile radial ply tyres. Moulded hub covers.

Electrical

12 volt negative earth system. Alternator. Twin column stalks for indicators, horn, dip and 2 speed wipers with electric screen washers and flk wiper. Rear screen wash/wipe. Thermostatic electric cooling fan. Heated rear window. Reversing lamps. Twin rear fog guard lamps. Hazard warning lamps. Halogen headlamps incorporating front side/indicator lamps. Clear lighter. Push-button LW/MW radio. Illuminated switchgear and heater controls.

Instrumentation

Printed circuit connections. Speedometer with trip recorder. Analogue clock. Fuel level and water temperature gauges. Warning lights for: Brake circuit failure/low fluid level, brake pad wear, choke, handbrake, oil pressure, seat belt ignition, main beam, indicators, hazard lamps, heated rear window, rear fog lamps.

Interior Features

Laminated windscreen. Velour fabric seat covering. Tilt/slide front seats with reclining squabs. Asymmetric, jack knife folding rear seats with hinged/detachable carpeted parcel shelf. Fitted carpet. Twin sun visors with passenger vanity mirror and driver's ticket pocket. Dipping rear view mirror. 4 spoke steering wheel. Front parcel shelf. Fresh air heater/demister with 2-speed fan and face level air vents. Passenger grab handles and coat hooks. Glovebox with carpet lining. Rear quarter trays. Loadspace floor mat and PVC-trimmed sides. Interior bonnet release. Concealed inert a reel front seat belts. Front door armrests and door pins.

Body Features

2 door hatchback, all steel unitary construction. Black rolled section bumpers with moulded wraparound cappings. Driver's door mirror. Side repeater flashers. Tailgate controlled by twin gas struts. Side rubbing strip. Fuel filler concealed behind flap. Extensive corrosion protection, including cathodic electrocoat primer on body and subframes, underbody seal and wax injection of box sections.

TECHNICAL SUMMARY

AUSTIN METRO		Standard	L	HLE	1.3S/HLS	1.3Automatic
Engine Capacity cc/Cylinders		998/4	998/4	998/4	1275/4	1275/4
Bore x Stroke mm		64.58 x 76.20	64.58 x 76.20	64.58 x 76.20	70.64 x 81.28	70.64 x 81.28
Max BHP (DIN) at RPM		45 at 5000*	45 at 5000	47 at 5500	60 at 5250	60 at 5250
Max Torque kgm (DIN) at RPM		7.77 at 2750*	7.77 at 2750	7.47 at 3250	9.63 at 3200	9.63 at 3200
Gear Ratios Manual/Auto	1st	3.647/-	3.647/-	3.647/-	3.647/-	-/2.690
	2nd	2.184/-	2.184/-	2.184/-	2.184/-	-/1.845
	3rd	1.425/-	1.425/-	1.425/-	1.425/-	-/1.460
	4th	1.00/-	1.00/-	1.00/-	1.00/-	-/1.00
	5th	-	-	-	-	-
	Reverse	3.666/-	3.666/-	3.666/-	3.666/-	-/2.690
	Final Drive	3.647/-	3.647/-	3.44/-	3.44/-	-/2.76
Economy Manual Transmission						
Constant speed driving (56 mph/90 kmh)		53.1 (5.3)*	53.1 (5.3)	58.3 (4.8)	51.2 (5.5)	-
Constant speed driving (75 mph/120 kmh)		38.5 (7.3)*	38.5 (7.3)	41.7 (6.8)	37.9 (7.5)	-
Simulated urban driving		38.4 (7.4)*	38.4 (7.4)	41.5 (6.8)	32.8 (8.6)	-
Automatic Transmission						
Constant speed driving (56 mph/90 kmh)		-	-	-	-	47.0 (6.0)
Constant speed driving (75 mph/120 kmh)		-	-	-	-	34.9 (8.1)
Simulated urban driving		-	-	-	-	33.5 (8.4)
<i>All figures (in mpg-L/100 km) are from officially approved tests under the Passenger Car Fuel Consumption Order 1977.</i>						
Towing Limits/ Roof rack weights						
Max towing limit (2-up) (cwt/kg)		16.7/850	16.7/850	12.8/650	18.7/950	12.8/650
Max roof rack load (lb/kg)		105/48	105/48	105/48	105/48	105/48
Insurance Group (as recommended by the Accident Offices Association)		1	1	1	2	2
Servicing Intervals-Major/intermediate (miles)		12,000	12,000	12,000	12,000	12,000/6,000†
Fuel (Star Rating)/Octane		4/97	4/97	4/97	4/97	4/97
Dimensions: Length in/m		134.0/3.40	134.0/3.40	134.0/3.40	134.0/3.40	134.0/3.40
Width in/m		60.9/1.54	60.9/1.54	60.9/1.54	60.9/1.54	60.9/1.54
Height in/m		52.3/1.33	52.3/1.33	52.3/1.33	52.3/1.33	52.3/1.33
Wheelbase in/m		88.6/2.25	88.6/2.25	88.6/2.25	88.6/2.25	88.6/2.25
Turning circle ft/m		33.5/10.2	33.5/10.2	33.5/10.2	33.5/10.2	33.5/10.2
Load capacity (cu ft)		7.47/45.7	7.47/45.7	7.47/45.7	7.47/45.7	7.47/45.7
Fuel tank capacity gals/litres		6.5/29.5	6.5/29.5	6.5/29.5	6.5/29.5	6.5/29.5

Optional Extras	Standard	L	HLE	1.3S/HLS	1.3Automatic
Denovo wheels and tyres	■	■	■	■	■
Headlamp wash unit	N/A	N/A	■	■	■
Laminated windscreen	■	Std	Std	Std	Std
Black paint finish	■	■	■	■	■
Metallic paint finish	■	■	■	■	■
Clear Coat Metallic paint finish	■	■	■	■	■
Manual radio/stereo cassette	■	■	■	■	■
Push-button radio	■	■	Std	Std	Std
Push-button radio/stereo cassette with Dolby	■	■	■	■	■
Rear window wash/wipe	■	Std	Std	Std	Std
Slotted head restraints	N/A	■	■	■ (1.3S) Std (1.3HLS)	Std
Tilting/removable steel sunroof	N/A	■	■	■	■
Trip computer	N/A	N/A	N/A	N/A (1.3S) ■ (1.3HLS)	N/A

† Oil change only. *Normal compression engine.